

SM-6220



SOFT SERVE FREEZER

PRODUCT INFORMATION

Type	Counter Top
Flavors	1
Cooling	Air Cooled
Freezing Cylinders	1x 1.7 L / 1.8 qt
Product Mix Hoppers	1x 8.0 L / 8.5 qt
Output (4oz Servings)	144 Servings / hr Max = Two, 4-6oz servings per min.
Motor	1x 0.6 HP, 450W
Compressor (Main)	1x 3650 BTU, R404A
Compressor (Auxilliary)	Solenoid

FEATURES

Machine Controls	Single, Digital
Refrigerated Hopper	Yes, Digital Control
Hopper Agitator	No
Temperature Display	Yes
Standby Mode	Yes
Low Mix Indicator Light	Yes
Low Mix Indicator Alarm	No
Low Temperature Protection	Yes
Motor Amperage Protection	Yes, Mechanical
High Pressure Protection	Yes
Thermal Overload Protection	Yes

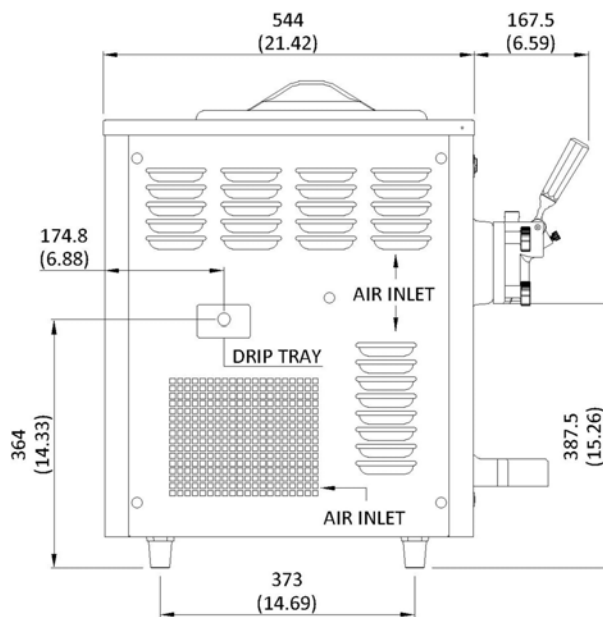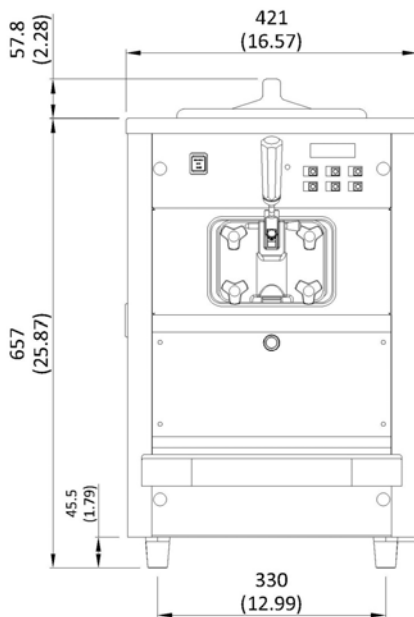

Tip: Output is rated in fluid ounces. This model is not designed for larger than 6 oz servings. Larger servings may starve the cylinder and result in freeze ups. Models with higher output and/or larger freezing cylinder are available.

Making your own recipe? Purchase a brix refractometer - ideal brix range for soft serve is 20-30

SERVINGS PER MINUTE

4oz	6oz	8oz	16oz
2	1-2	n/a	n/a

DESCRIPTION

A single flavor, gravity feed, countertop soft serve freezer. Capable of producing a variety of Soft Serve products including: Frozen Yogurt, Ice Cream, Custards, and Sorbets. Digital control system automatically regulates and maintains consistent product quality. Refrigerated hopper and Standby Mode keeps product fresh, even overnight, and is approved for dairy and non-dairy products.

CUSTOM OPTIONS

Air Chute

ELECTRICAL SPECIFICATIONS

	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
110-115/60/1	1 x 20A	1 x 18A	2P / 3W

Electrical Plug: 1x NEMA 5-20

SIZE SPECIFICATIONS

	Machine		Shipping	
Weight	90 kg	200 lbs	100 kg	222 lbs
Depth (mm / in)	544*	21.5*	700	27.6
Width (mm / in)	421*	16.6*	465	18.3
Height (mm / in)	698	27.5	840	33.1

Shipping Volume: 0.27 CBM / 9.54 CBF

* Machine Requires Minimum 6" Clearance on all sides